




REV.	DESCRIPTION	DATE	BY

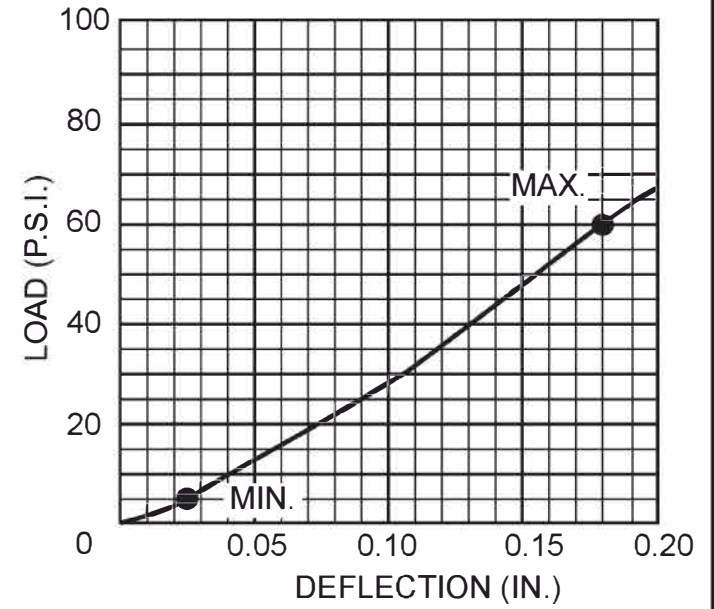

SPECIFICATIONS:

MATERIALS: RIBBED ELASTOMERIC FACE SHEETS, ALTERNATE HIGH AND LOW RIBS, 3 PER INCH, BONDED TO 1/2" SOUND/VIBRATION ABSORBING PAD.

THICKNESS: 1"

RECOMMENDED LOADING: 5-60 P.S.I.

DEFLECTION: 0.025" TO 0.18"

NOTES:

1) AVAILABLE IN 36" X 36" SHEETS AND ALSO IN SMALLER SIZES CUT TO ORDER.

SIZE	LOAD RANGE
2 X 2	20 - 240
3 X 3	45 - 540
4 X 4	80 - 960
5 X 5	125 - 1500
6 X 6	180 - 2160
8 X 8	320 - 3840
9 X 9	405- 4860

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



DFA Sales
www.Korfund.com
info@Korfund.com

MODEL NRC 20-4860 LBS.
 ELASTOMERIC SQUARE INCH
 ISOLATION PAD

SCALE :

NONE

SHEET:



DRAWING NO.:

REVISION