
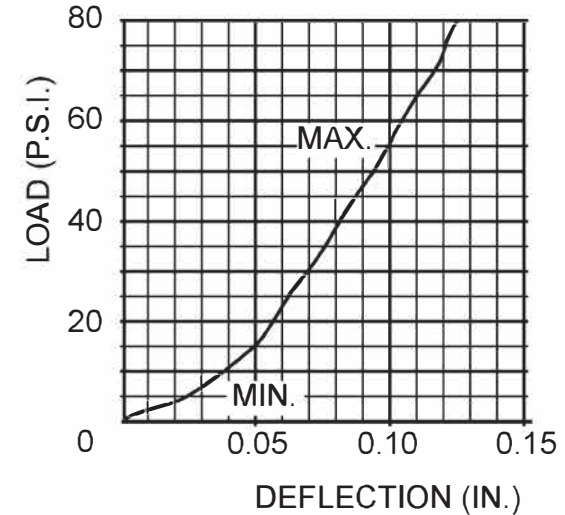


REV.	DESCRIPTION	DATE	BY

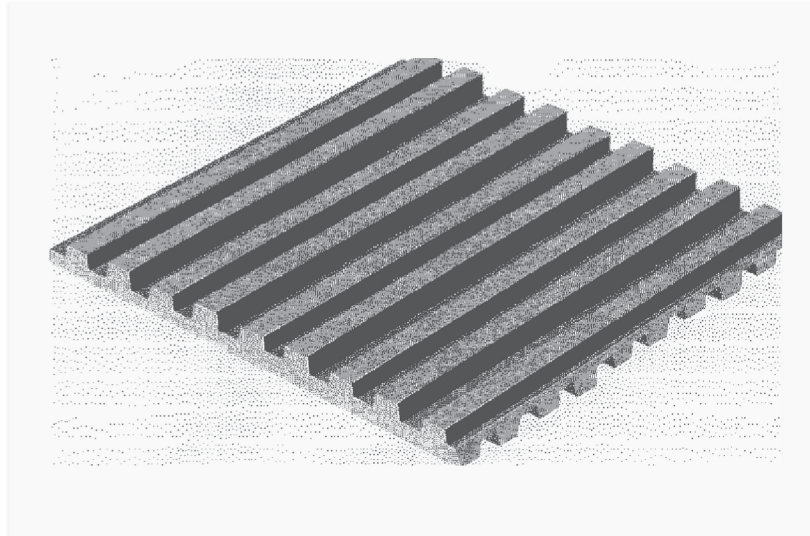

**SPECIFICATIONS:**

**MATERIALS:** RIBBED ELASTOMERIC PAD, ALTERNATE HIGH AND LOW RIBS, 3 PER INCH  
**THICKNESS:** 3/8"  
**RECOMMENDED LOADING:** 5-50 P.S.I.  
**DEFLECTION:** 0.025" TO 0.095"

SIZE	LOAD RANGE
2 X 2	20 - 200
3 X 3	45 - 450
4 X 4	80 - 800
5 X 5	125 - 1250
6 X 6	180 - 1800
8 X 8	320 - 3200
9 X 9	405- 4050

**NOTES:**

- 1) AVAILABLE IN 18" X 36" SHEETS AND ALSO IN SMALLER SIZES CUT TO ORDER.
- 2) ALSO FURNISHED AS 1/4" THICK FLATBACK (RIBS ONE SIDE ONLY.)

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



**DFA Sales**  
[www.Korfund.com](http://www.Korfund.com)  
[info@Korfund.com](mailto:info@Korfund.com)

MODEL NR 20-4050 LBS.  
 ELASTOMERIC 0.375 INCH THICK  
 ISOLATION PAD

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION

O.: